



HOLLANDIA 700 INBUILT SUNROOF OWNERS MANUAL

Dear Customer,

Champion Auto Systems would like to thank you for purchasing a Hollandia 700 Series sunroof. Below you will find everything you need to know about this Hollandia 700 Series tilting and sliding sunroof. In order to achieve maximum sunroof functionality, please read through these instructions carefully. We expect you will enjoy years of enhanced sunshine and fresh air while driving.

SWITCH

The sunroof can be operated by a 3 button switch with symbols. You can either Vent, Open or Close the glass panel.

The switch has LED illumination that can be adjusted by your Authorized Installer to Blue, Green, Red, or White.

OPERATION

Ensure that your vehicle ignition is switched ON.

SLIDE OPEN

By continuously pressing the button the glass panel will move in the OPEN direction. The movement of the panel continues as long as the button is pressed. The panel stops when the button is released or the FULL SLIDE OPEN position is reached.

ONE TOUCH SLIDE OPEN

By pressing the button briefly (max. 0.3 seconds) the glass panel will move automatically towards the FULL SLIDE OPEN position. The panel stops when any of the buttons are pressed or when the FULL SLIDE OPEN position is reached.

ONE TOUCH VENT

By pressing the button briefly the glass panel will move automatically towards full vent position. The panel stops when any of the buttons are pressed or when the FULL TILT position is reached.


CLOSE

By continuously pressing the middle button the glass panel will move towards CLOSE position. The movement of the panel continues as long as the button is pressed. The panel stops when the button is released or the FULL CLOSE position is reached.

ONE TOUCH CLOSE

By pressing the button briefly (max. 0.3 seconds) the glass panel will move automatically towards the FULL CLOSE position. The panel stops when any of the buttons are pressed or when the FULL CLOSE position is reached.

H700 SWITCH REFERENCE

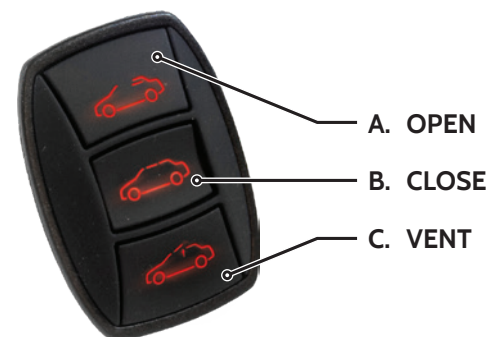

ADDITIONAL FEATURES

ANTI-PINCH PROTECTION (Safety Feature)

The anti-pinch protection becomes active when the sunroof is closed either by CLOSE, ONE TOUCH CLOSE or AUTO-CLOSE. Should the glass panel encounter an obstacle while closing, it automatically opens again.

AUTO-CLOSE

When turning off your vehicles ignition, the AUTO-CLOSE will be activated. After three seconds the sunroof will close automatically. This counts only when the glass panel is in SLIDE position. In case the panel is in TILT position, it will remain open to keep the ventilation function.

Should you require the sunroof to stop, while closing, press any of the buttons briefly. You can also prevent the panel from closing by pressing any of the buttons within the three second interval.

When you switch the ignition on, the sunroof can be operated in the normal manner.

ILLUMINATION

The switch is equipped with 4 color LEDs (white, green, blue and red) to allow for the best match with the factory set instrumentation coloring. The default color setting is white. If not already done you can ask your installer to change the color.

WIND DEFLECTOR

In order to reduce wind noise and buffeting the sunroof is equipped with a wind deflector. The wind deflector will automatically pop up in SLIDE position. Note that in certain lower speeds with the glass panel fully open it may be necessary to lower the door glass or close the glass panel slightly to minimize a wind buffeting condition.

SUNSHADE

Sunshade operation depends on glass panel movement. By moving the panel to TILT position, the sunshade automatically opens slightly to allow for some airflow. If desired it can be opened further manually.

By moving the panel to SLIDE position, the sunshade will move simultaneously, but can also be opened further manually. Closing the sunshade always has to be done manually. The sunshade can only be closed completely when the panel is in FULL CLOSE position.

MAINTENANCE

DRAIN TUBES

Your sunroof includes a water management system consisting of 4 drain tubes to route water outside your vehicle. These drain tubes should be free from debris and checked occasionally to ensure proper water routing.

GLASS PANEL

To clean the glass panel use only a mild, non-scratching detergent and a brush or sponge. When starting your journey you are advised not to open the sunroof during the first few minutes if there is moisture on the panel. Champion Auto Systems recommends first driving with the sunroof closed until all moisture has evaporated.

WARRANTY

Champion Auto Systems warrants to the original purchaser, a 3 year, unlimited mileage warranty on all component parts of the Hollandia 700 series sunroofs against defective materials or workmanship when serviced by an Authorized Champion Auto Systems Dealer.

Proof of original purchase and date of installation are required to receive warranty service.

The warranty applies only when the sunroof has been installed in accordance with Champion Auto Systems installation instructions. Defects caused by rough handling, incorrect use, accident and broken glass are not covered by this warranty. Transportation costs are the responsibility of the owner.

Labor costs for installation or service are not covered under this warranty and should not be assumed unless the installer provides a separate written warranty.

All obligations of Champion Auto Systems under this warranty shall be terminated if:

- Service is performed by a non-Authorized Champion Auto Systems Dealer
- The product is modified or altered in a way not approved by Champion Auto Systems
- The owner cannot produce evidence of original purchase, and installation date.

Champion Auto Systems makes no other warranty of any kind whatever, express or implied; and all implied warranties of merchantability and fitness for a particular purpose which exceeds the above stated obligations are disclaimed by Champion Auto Systems and excluded from this agreement.